




Quick Disconnect

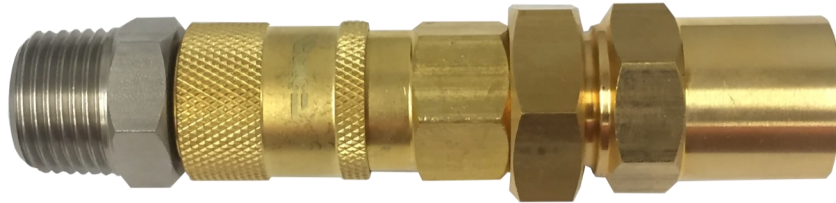

Instructions

Step 1: Remove outer hose fitting



Step 2: Screw outer hose fitting onto hose.



Step 3: Screw inner hose fitting into outer hose fitting.



Step 4: Remove 3/4" gun fitting and install male quick disconnect fitting.

