

REC 15 ABZ

By professionals – for professionals: Electronically controlled battery backpack sprayer

max.
6 bar

G 1/4"



Li-Ion 18 V



Electronic 1



Protection



Garden



pH 1-7




pH 7-14



Solvent

Performance characteristic

- 18 V Lithium
- 0.5 – 6 bar
- 9 h / 200 litre*
- Battery  < 1 h

*at 1.5 bar / mist



Made in Switzerland

The new battery-operated backpack sprayer: high-performance, versatile, ergonomic...

The completely new concept of controlling the pressure by electronics enables new options for the user. The operating pressure at the nozzle is adjusted with an application controller. Everything is monitored and controlled by the electronics: constant pressure, on, off, pump protection functions and battery charge state. The removable battery enables uninterrupted working. No control wires in the hand valve. Therefore less prone to faults and the accessories can be used to their full extent.

Real work comfort!

- Consistent spray pattern
- Drop size adjustable
- Re-defined ergonomics
- Hose outlet in front
- Click belt system



Proven Birchmeier technology

- Robust pump
- Tank outlet via suction system
- New designed click belt system
- Brass nozzle adjustable
- Top quality mountings
- Large filling opening with strainer



Video and further information



Electronically controlled


- Continuous operating pressure
- Pressure range: 0.5 – 6 bar
- Protective setup for pump and battery
- Energy efficient



Vario Gun
Art.No. 11558501



Spray hood oval, white
Art.No. 10501606




Herbicide floodjet nozzle
Art.No. 10501803-SB



Fanjet nozzle
Art.No. 11612810



Biofilter
Art.No. 11475701-SB

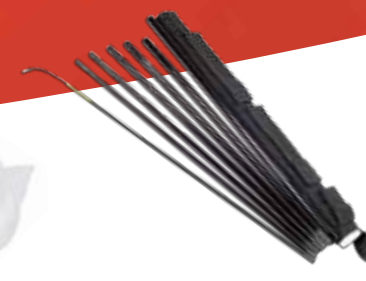

Telescopic extension 7 m
Art.No. 11935801




Spray boom aluminium
Art.No. 11889501-SB


Accessories

More accessories www.birchmeier.com

Spray output REC 15 ABZ (Nozzle position stream)

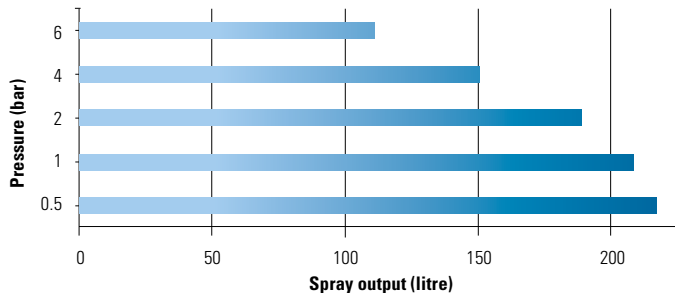

Spray period REC 15 ABZ (Nozzle position mist)

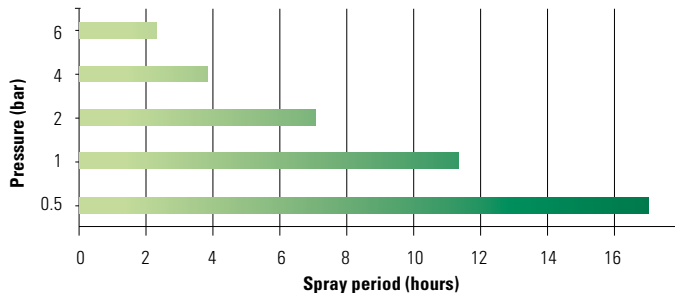

REC 15 ABZ
Art.No. 11925001

Technical Specifications

Tank volume	15 litre (4 US gal)
Max. pressure	6 bar (87 psi)
Battery	Lithium-ion battery 18 V / 3 Ah
Battery charging time	1 h
Life span battery	approx. 800 charging cycles
Nozzle type	Adjustable nozzle
Nozzle material	Brass
Nozzle hole size	1.7 mm
Seals	NBR
Fitting assembly	Screw
Pump	Piston pump 12 V / DC
Min./max. temperature	5 °C / 30 °C (41 °F – 86 °F)
Dimension (H x W x L)	610x400x220 mm (2.0x1.3x0.72 ft)
Emty weight with battery	4.4 kg (9.7 lbs)
Sound pressure level	< 70 dB (A)
Stress class	2

Further Birchmeier products:



Your Birchmeier distributor

BIRCHMEIER®

Birchmeier Sprühtechnik AG
Im Stetterfeld 1
5608 Stetten
Schweiz
Telefon +41 56 485 81 81
Fax +41 56 485 81 82
www.birchmeier.com